





Hexmesh Type 28NS



TYPE	RIBS				Hexagonal Key "A"		Side "B"		Weight	Specification
	Depth		Thickness "S"							
28NS	19mm. 3/4"		2 mm. 14 GA		48 mm.	1 7/8"	28 mm.	1 7/64"	11,8 kg/m ²	UOP 3-25-4
	19mm. 3/4"		1,5 mm. 17 GA							
28NS (L)	19mm. 3/4"		1,5 mm. 17 GA		48 mm.	1 7/8"	28 mm.	1 7/64"	10,5 kg/m ²	LIGHT WEIGHT
	19mm. 3/4"		2,5 mm. 12 GA							
28NRS	19mm. 3/4"		2,5 mm. 12 GA		48 mm.	1 7/8"	28 mm.	1 7/64"	14,2 kg/m ²	HEAVY DUTY
	19mm. 3/4"		2,5 mm. 12 GA							

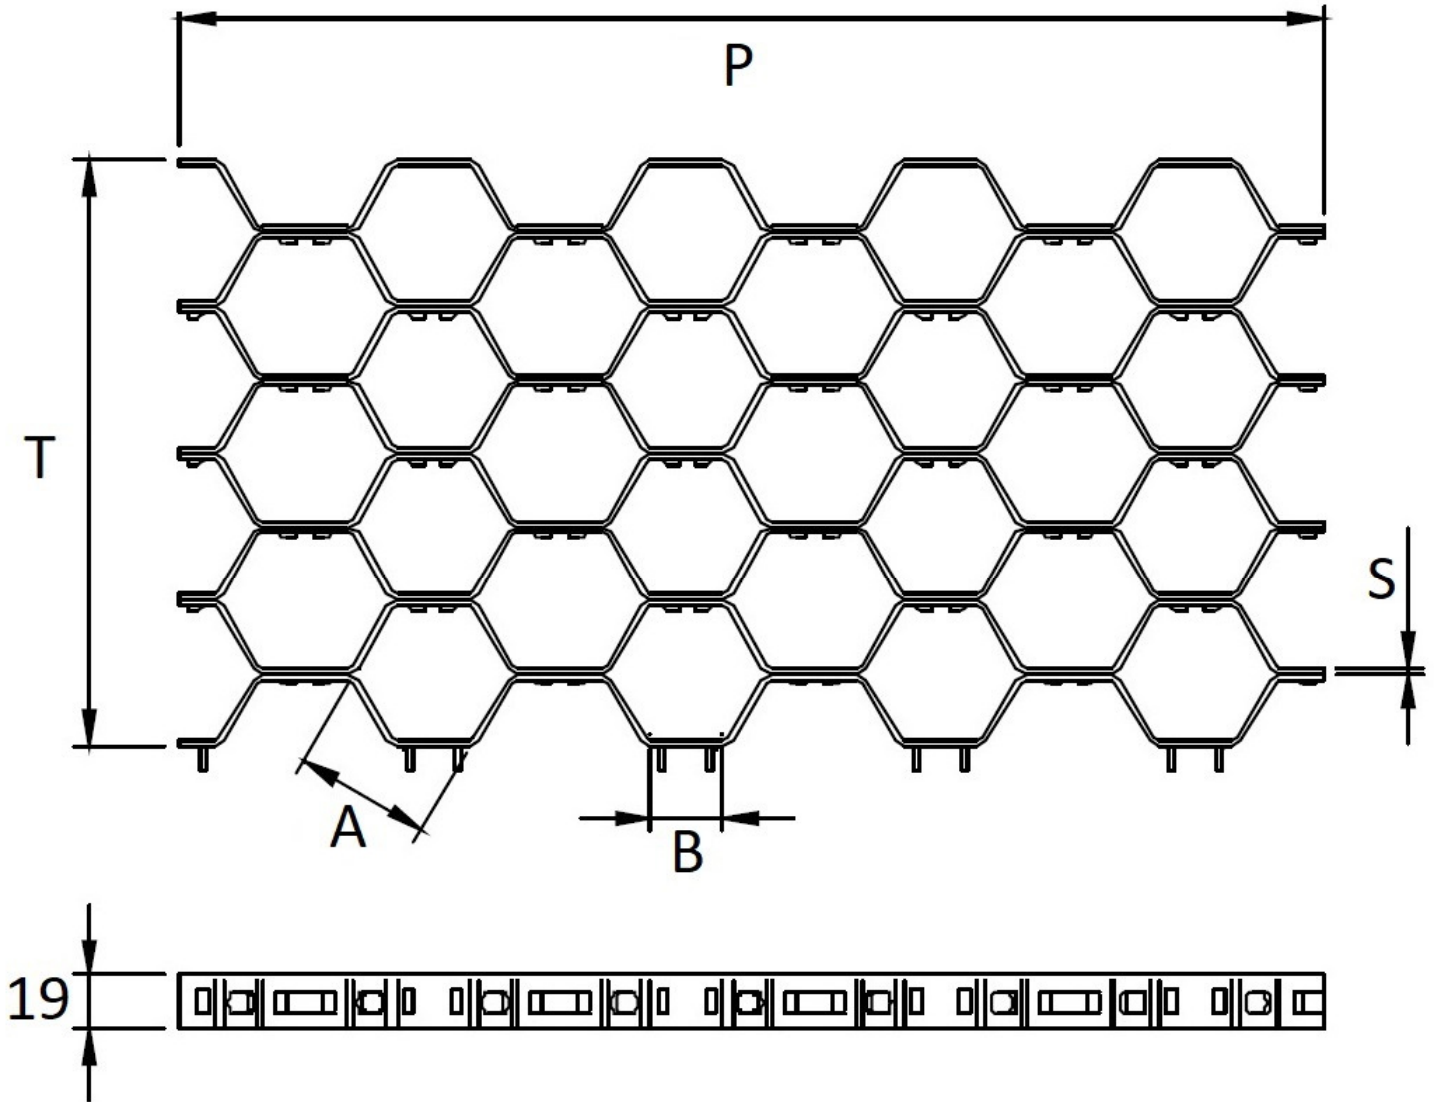

Hexmesh Type 28NSL

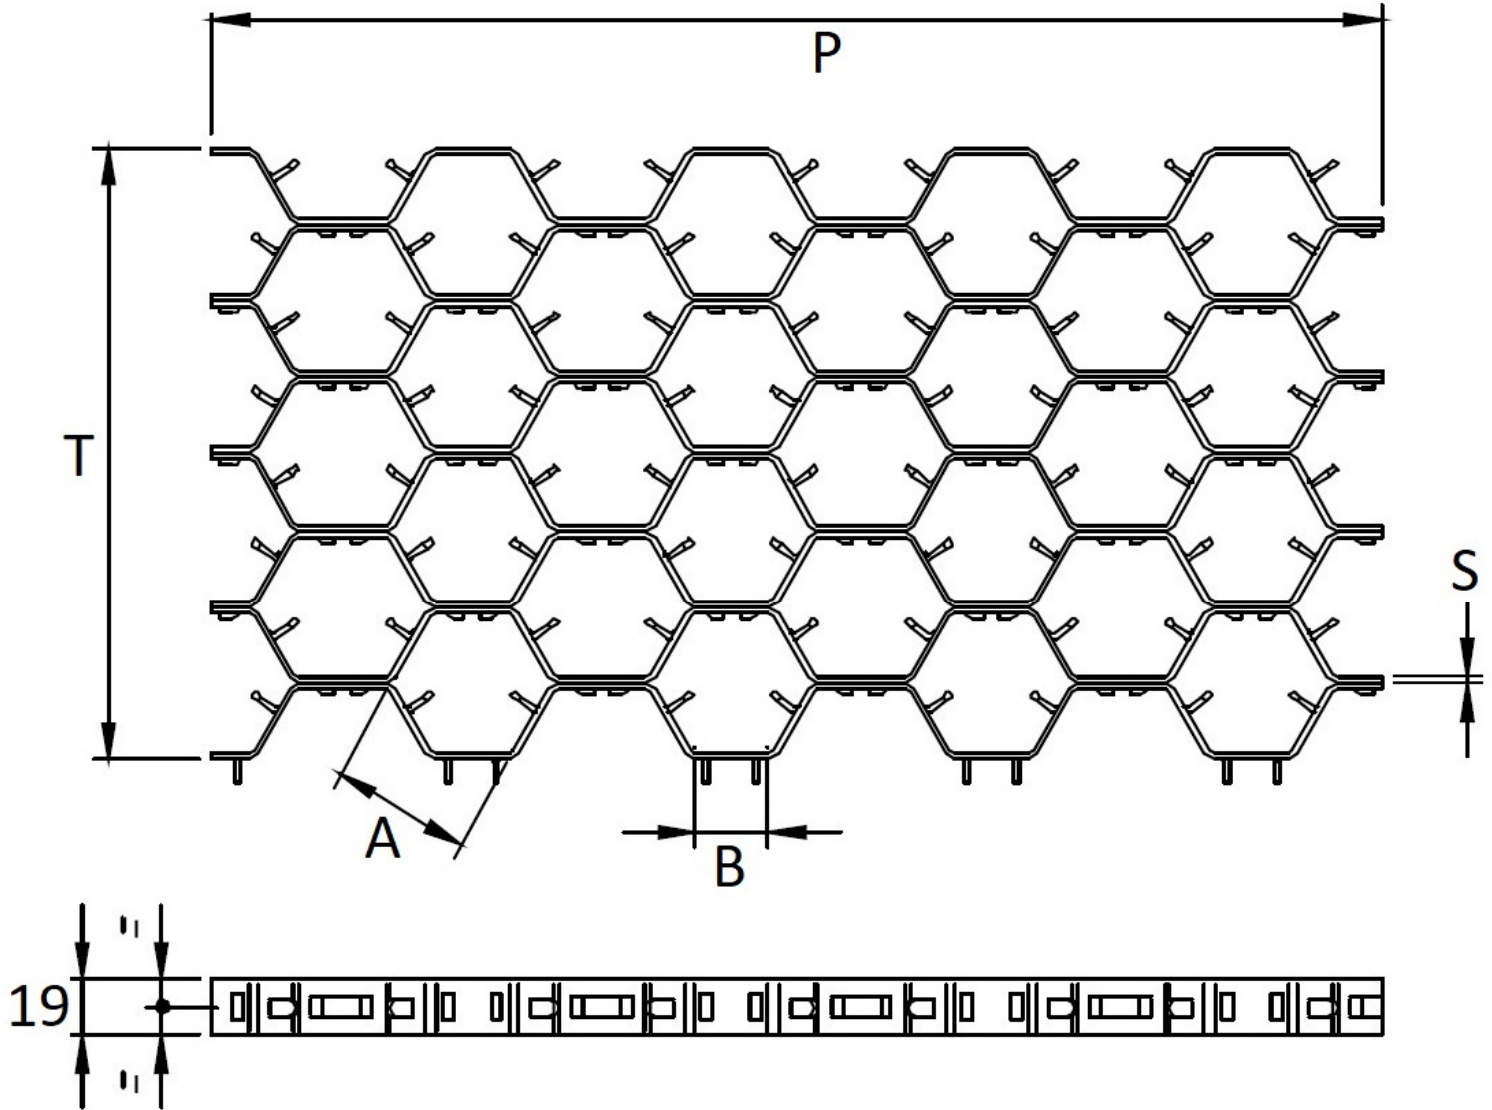

TYPE	RIBS				Hexagonal Key "A"		Side "B"		Weight	Specification
	Depth	Thickness "S"			48 mm.	1 7/8"	28 mm.	1 7/64"		
28NLS	19mm.	3/4"	2 mm.	14 GA					48 mm.	1 7/8"
	19mm.	3/4"	1,5 mm.	17 GA						
28NLS (L)	19mm.	3/4"	1,5 mm.	17 GA	48 mm.	1 7/8"	28 mm.	1 7/64"	12,4 kg/m ²	LIGHT WEIGHT
	19mm.	3/4"	2,5 mm.	12 GA						
28NLS	19mm.	3/4"	2,5 mm.	12 GA	48 mm.	1 7/8"	28 mm.	1 7/64"	16,8 kg/m ²	HEAVY DUTY
	19mm.	3/4"	2,5 mm.	12 GA						